


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 11/05/08	~	

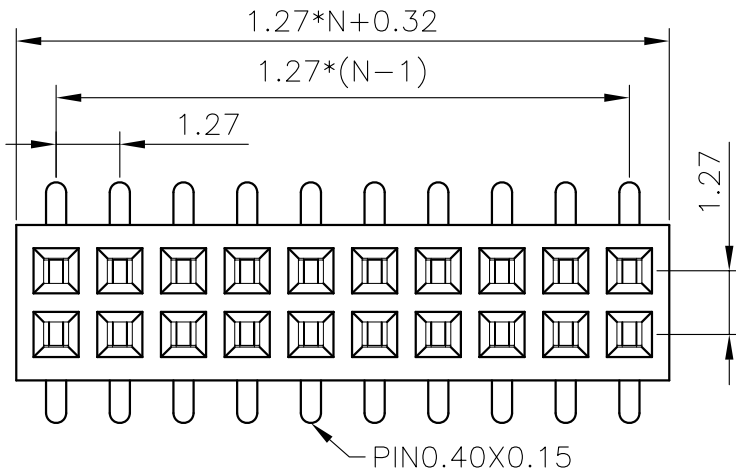

NOTES:



1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C



2.PART NUMBER: DS1065-05

3.PRODUCT NUMBER CODE:

DS1065-05

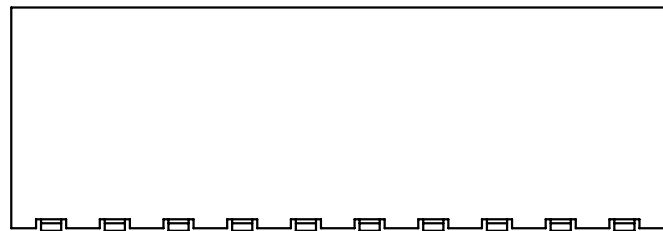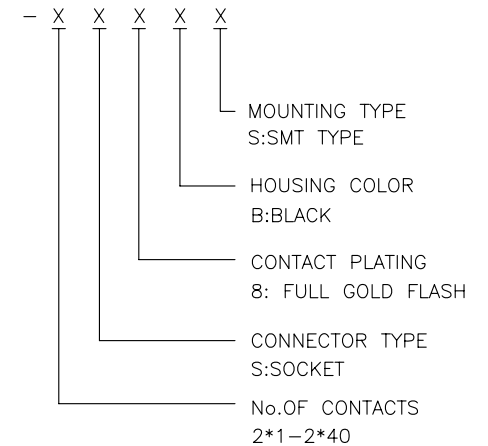

N=No. of contacts/2

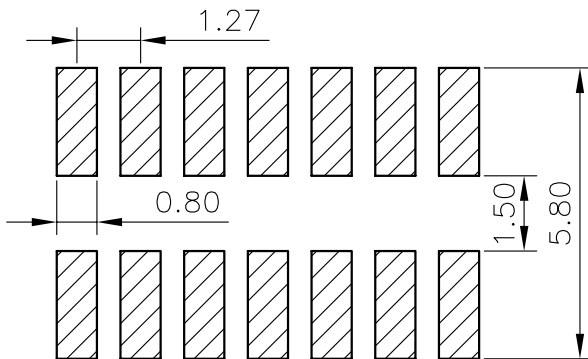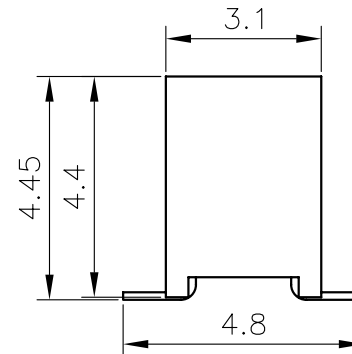

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

Kxd 1.27#06SG-4828D

GENERAL TOLERANCE

X.	±0.60
.X	±0.38
.XX	±0.25



TITLE

FEMALE HEADER PITCH 1.27mm
S.M.T TYPE

SERIES

DS1065-05

DRAWING TYPE

CUSTOMER

SCALE

1:1

1 OF 1

DRAWING NO.

C-DS1065-05-XXXXX



SEMIC TRADE, s.r.o.

Volutová 2521/18

158 00 Praha 5

Czech Republic

www.semic.cz

semic@semic.cz

tel.: +420 251 625 331, 332, 377

fax: +420 251 626 252, 393